

# Burglar-proof Fire Door IB-BD

Fire category A 60. Burglar resistance category 2, ENV 1627.



**MaxiDoor**

Stenfallsgatan 2, SE-718 32 Frövi  
Tel +46 581 377 80 Fax +46 581 377 89  
info@maxidoor.se www.maxidoor.se

**MaxiDoor**

# Burglar-proof, durable, fireproof

Single-leaf fire door/steel door. Fire category A60. Burglar resistance category 2 under ENV 1627.

## IB-BD

For use as a burglar-resistant fire door. Suitable as an outer door in storerooms, cellars, etc., and as an interior door in situations where a very strong, burglar-proof door is required.


IB-BD is based on our tried-and-tested fire door design. The door features 4 mm sheet steel break-in protection on the front, reinforced welded hinges, and internal reinforcement against break-in. Manufactured from cold-rolled steel as standard or from hot-dip galvanized sheet steel to order.

This type of door allows a great deal of flexibility and customization in respect of dimensions and features. The door is produced as standard in Fire category A 60.

The door can also be produced in a double-leaf version, but this version is not certified as burglar-resistant.

### CERTIFICATION AND APPROVALS

- Fire category A60, burglar-resistance category 2. The door is labeled with test results on delivery.
- MaxiDoor is ISO-certified in respect of quality assurance, environmental protection and the working environment.

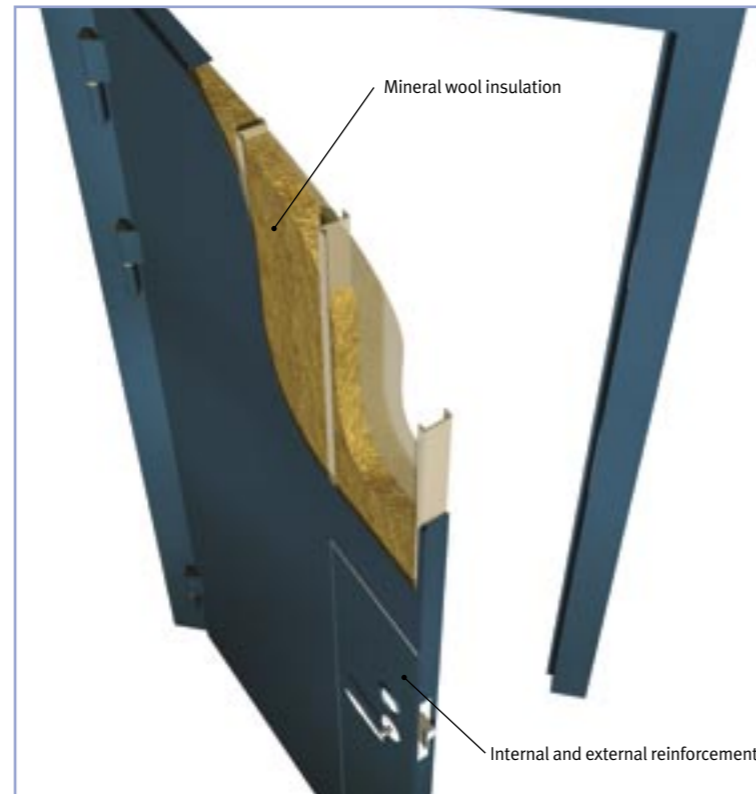

#### DOOR LEAF

Rebated door in 1.25 mm sheet steel. Internal welded struts. Mineral wool insulation. Door thickness 54 mm. Externally, visible break-in protection on front. Internally, reinforced lock fixing and reinforced hinges.

#### FRAME

Available in models A, B and C, all in 2.0 mm sheet steel. Fixings with adjustable frame bolts. The frame is supplied ready-assembled, with welded corners, and insulated with mineral wool.

#### FINISH

Powder-coated in the RAL colour of your choice, or painted in grey primer.

#### FITTINGS

Welded hinges, securely pinned on back. Assa 410/50 lock mechanism is standard, as is reinforcement for door closers.


#### OTHER FEATURES

Can be fitted with motorized lock, micro lock, conduits, wiring, and much more.

*SS-ENV 1627 is the current Swedish Standard for burglar-resistant doors. Category 2 can withstand attempted break-ins by "casual" burglars equipped with tools such as chisels and pliers. For increased protection, see the brochure on our Security Door SD-BD, category 3.*

Module	Wall aperture +20, -5 mm	Frame aperture mm	Weight kg
09 x 21	900 x 2100	800 x 2030	85
10 x 21	1000 x 2100	900 x 2030	90
11 x 21	1100 x 2100	1000 x 2030	95
12 x 21	1200 x 2100	1100 x 2030	100

## DIAGRAMS OF BURGLAR-PROOF FIRE DOOR

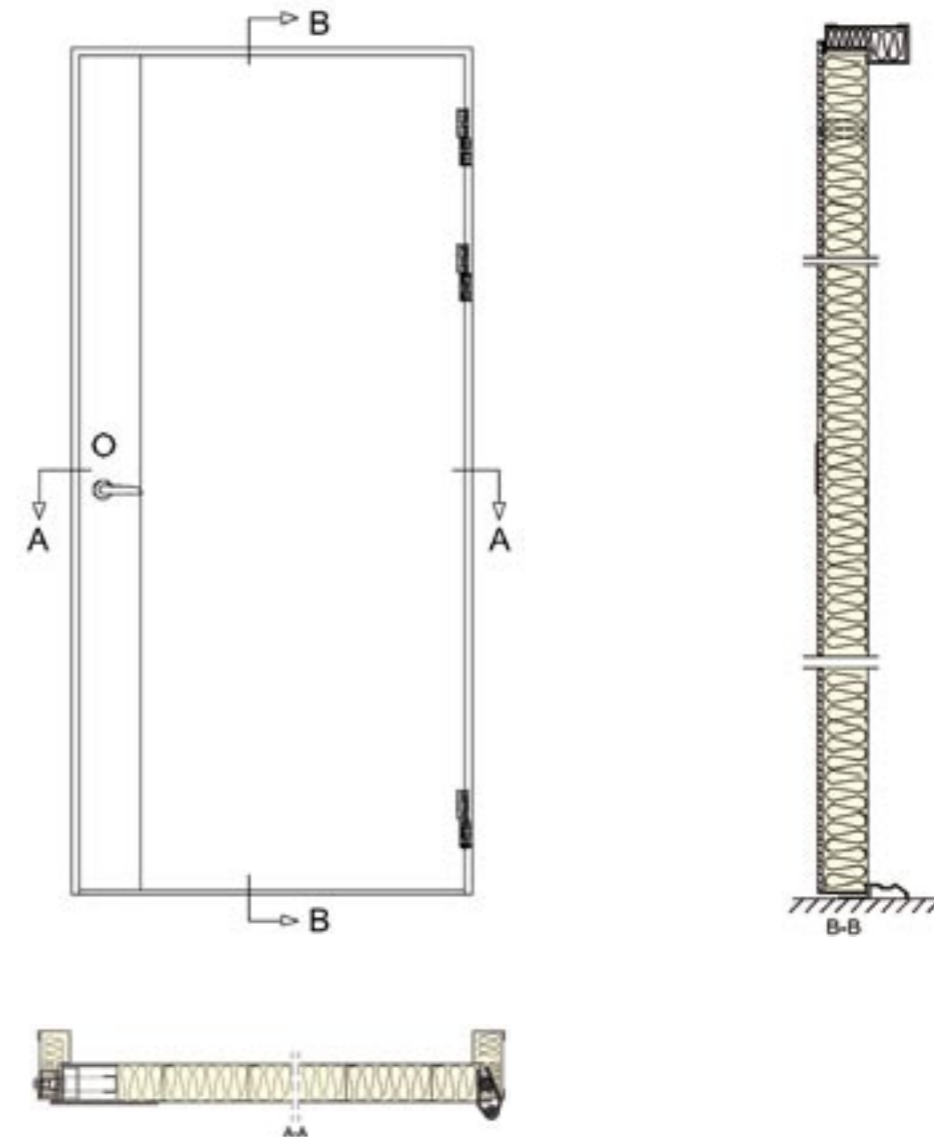

## FRAME TYPES

